

Hyper SuperServer SYS-120H-TNR




More details here

Key Applications

Virtualization, Software-defined Storage, AI Inference and Machine Learning, Cloud Computing, Enterprise Server,


Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- 32 DIMM Slots; Up to 8TB DRAM; Up to 8TB Intel® Optane™ Persistent Memory (up to 12TB with DRAM); 3200/2933/2666 ECC DDR4 LRDIMM; RDIMM; Intel® Optane™ Persistent Memory 200 series;
- 3 PCIe 4.0 x16 slots with support for GPU/Accelerator cards;
- Flexible networking options with 1 AIOM networking slot (OCP NIC 3.0 compatible);
- 8x 2.5" hot-swap NVMe/SATA/SAS drive bays; Optional 4x 2.5" hot-swap NVMe/SAS/SATA drive bays; 2x internal M.2 NVMe/SATA drive slots; Optional RAID support via storage add-on card;
- 8 heavy duty hot-swap fans with optimal fan speed control;

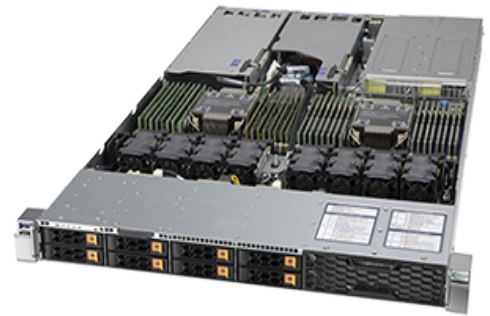

Form Factor	1U Rackmount Enclosure: 437 x 43 x 747mm (17.2" x 1.7" x 29.4") Package: 605 x 206 x 1032mm (23.8" x 8.1" x 40.6")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache per CPU
GPU	Max GPU Count: Up to 2 double-width GPU(s)
System Memory	Slot Count: 32 DIMM slots Max Memory (2DPC): Up to 8TB 3200MT/s ECC DDR4 Supports Intel® Optane™ persistent memory 200 series
Drive Bays	8x 2.5" hot-swap NVMe/SATA/SAS drive bays (8x 2.5" NVMe hybrid)(Configurable option for 12x 2.5" hot-swap NVMe/SAS/SATA drive bays. NVMe, SATA, or SAS support requires additional parts. Please see the Optional Parts list.) 2 M.2 NVMe OR 2 M.2 SATA3 M-Key, 2280/2210
Expansion Slots	1 PCIe 4.0 x16 FH, 6.6"L slot(s) 2 PCIe 4.0 x16 FH, 10.5"L slot(s)
On-Board Devices	SATA: SATA3 (6Gbps); RAID 0/1/5/10 support NVMe: NVMe; RAID 0/1/5/10 support (Intel® VROC RAID key required) Chipset: Intel® C621A Network Connectivity: 2x 1GbE BaseT with Intel® i350-AM2 (optional) 4x 1GbE BaseT or 4x 1GbE SFP with Intel® i350-AM4 (optional) 2x 10GbE BaseT with Intel® X550-AT2 (optional) 2x 10GbE SFP+ with Intel® X710-BM2 (optional) 4x 10GbE SFP+ with Intel® XL710-BM1 (optional) 4x 10GbE RJ45/SFP+ with Intel® X710-TM4 (optional) 2x 25GbE SFP28 with Broadcom® BCM57414 (optional) 4x 25GbE RJ45/SFP28 with Mellanox® CX-4 Lx EN Intel® X550-AT2 (optional) 2x 100GbE QSFP28 with Broadcom® BCM57508 (optional) IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 Dedicated BMC LAN port USB: 3 USB 3.0 port(s) (2 rear; 1 front) Video: 1 VGA port(s)

(Front View – System)

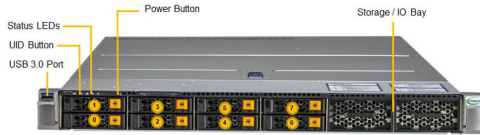

Slot	Description
1 - 2	2.5" Hot-swap NVMe/SAS3/SATA3 Drive Bays (NVMe from CPU1)*
3 - 4	2.5" Hot-swap NVMe/SAS3/SATA3 Drive Bays (NVMe from CPU2)*

*NVMe, SAS3, or SATA3 support requires additional parts in optional parts list

(Rear View – System)



Slot	Description
A	AIOM / OCP 3.0 NIC Slot
1	PCI-E 4.0 x16 Slot (FH, 6.6'L)
2	PCI-E 4.0 x16 Slot (FH, 10.5'L)
3	PCI-E 4.0 x16 Slot (FH, 10.5'L)

CPU CPU

System Cooling	Fans: 8x 4cm heavy duty fans with optimal fan speed control Air Shroud: 2 Air Shroud(s)
Power Supply	2x 1200W Redundant Titanium Level power supplies
System BIOS	BIOS Type: AMI 256MB SPI Flash
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Height: 1.7" (43 mm) Width: 17.2" (437 mm) Depth: 29.4" (747 mm) Gross Weight: 49 lbs (22.2 kg) Net Weight: 34 lbs (15.4 kg) Packaging: 8.1" (H) x 23.8" (W) x 40.6" (D) Available Color: N/A
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X12DHM-6
Chassis	CSE-HS119-R1K24P