

A solid red circle positioned to the left of the main title text.

FS S5850 Series Switches Data Sheet

Contents

Product overview	3
Product highlights	5
Platform details	6
Platform benefits	24
Software requirements	26
Licensing	27
Product specifications	27
Quality certification	33
Optics supported	33
Warranty, service and support	33
Ordering information	34
Additional information	36
Document history	36

Product overview

FS S5850 series switches are high performance Ethernet switches to meet next generation Metro, Data Center and Enterprise network requirements, which support L2/L3/IPv6/Data Center/Metro features. The S5850 Series Switches come with complete system software with comprehensive protocols and applications to facilitate rapid service deployment and management for both traditional L2/L3 networks and Data Center networks.

S5850-48T4Q features an advanced hardware design combined with 48x 100/1000M/5G/10GBASE-T ports and 4x 40Gb ports. This 10GBASE-T switch offers backwards compatibility with installed Ethernet cabling and standard RJ-45 connectors. The switch comes with the complete system software with comprehensive protocols and applications to facilitate the rapid service deployment and management for traditional Layer 2 and Layer 3 networks. Offering high-performance, high port density, and low latency, S5850-48T4Q is well-suited to both the core and aggregation layers, enabling to meet data centers, carriers and enterprise network requirements.

S5850-48S6Q is a high-performance Layer 3 Leaf switch with 48x 10Gb SFP+ access ports and 6x 40Gb QSFP+ ports in a compact 1U form factor. The switch delivers rich layer 2 and layer 3 features with wire speed performance up to a maximum performance of 1.44 Tbps. Supporting advanced features, including MLAG, VXLAN, IPv4/IPv6, SFlow, SNMP etc., this switch meets the next generation Metro and enterprise network requirements, and it is also ideal for traditional or fully virtualized data center.

S5850-48S6Q-R is a high-performance Layer 3 Leaf switch with 48x 10Gb SFP+ access ports and 6x 40Gb QSFP+ ports in a compact 1U form factor. The switch delivers rich layer 2 and layer 3 features with wire speed performance up to a maximum performance of 1.44 Tbps.

This switch supports rich features, including redundant hot-swappable power supplies and fans, MLAG, VXLAN, IPv4/IPv6, sFlow, SNMP, etc. to meet the requirements of next-generation Enterprise, Data Center, Metro and HCI (Hyper-Converged Infrastructure) networks.

S5850-48B8C 48-port 10Gb Ethernet layer 3 switch features 48x 25G downlinks and 8x 100G QSFP28 uplinks. The switch can deliver 4 Tbps switching capacity and 2976 Mpps forwarding rate. The S5850-48S8C 48-port 10Gb Ethernet layer 3 switch features 48x 10G downlinks and 8x 100G QSFP28 uplinks. The switch can deliver 2.56 Tbps switching capacity and 1905 Mpps forwarding rate. S5850-48B8C and S5850-48S8C are packed with redundant hot-swappable power supplies, hot-swappable smart fans and hardware-level dual-flash chip for superior processing performance and network reliability. These managed switch are ideal for enterprise network private cloud TOR, data center TOR, operator PE to meet the needs of high-speed, safe, intelligent enterprise networks.

S5850-24S2Q layer 3 switch features 24x 1Gb/10Gb and 2x 40Gb QSFP+ ports, providing the flexibility to support mixed 1Gb, 10Gb and 40Gb environments. This managed enterprise switch delivers 640 Gbps switching capacity with rich layer 2 and layer 3 features. Delivering wire-speed performance on every port, full device redundancy, support L3 routing protocols such as RIP, OSPF, BGP, a comprehensive security and QoS feature set, the S5850-24S2Q is ideal for large-scale campus network aggregations, small and medium-sized network cores.

S5850-24S2C is a high-performance Layer 3 Ethernet switch with 24x 1/10Gb SFP+ and 2x 40/100Gb QSFP28 ports in a compact 1U form factor. The switch comes with complete system software, comprehensive protocols and applications to facilitate the rapid service deployment and management for traditional Layer 2 and Layer 3 networks. It is ideally designed for demanding workloads. Supporting advanced features, including MLAG, EVPN, SR-MPLS, VXLAN, IPv4/IPv6, sFLOW, SNMP etc., this switch meets the next generation Metro and enterprise network requirements, and it is also ideal for traditional or fully virtualized data center.

S5850-24T16B is a high-performance Layer 3 Ethernet routing switch with 24x 10/100/1000BASE-T RJ45 and 16x 10Gb SFP+/25Gb SFP28 ports in a compact 1U form factor. Based on FSOS system software, it supports full L3 routing protocol (OSPF, BGP, and ISIS), multiple IPv4/IPv6 tunnel technique, data center DCB features (PFC/ECN/ETS) and MLAG etc. With its diverse set of deployment options, including fabric, Layer 3, as well as spine and leaf, the switch is ideal for next generation enterprise, data center, Metro and HCI (Hyper-Converged Infrastructure) networks.

S5850-24XMG features 24x 10/100/1000M/2.5G/5G/10GBASE-T ports and 2x 100Gb ports. This 10GBASE-T switch offers backwards compatibility with installed Ethernet cabling and standard RJ-45 connectors. The switch comes with the complete system software with comprehensive protocols and applications to facilitate the rapid service deployment and management for traditional Layer 2 and Layer 3 networks. Offering high-performance, high port density, and low latency, S5850-24XMG is well-suited to both the core and aggregation layers, enabling to meet requirements of next generation enterprise, Wi-Fi 6 Access, Metro and HCI (Hyper Converged Infrastructure) networks.

S5850-24XMG-U is equipped with 24x 10/100/1000M/2.5G/5G/10GBASE-T ports and 2x 100Gb ports. This switch support both IEEE 802.3af/at/bt (up to 90W per port) for powering attached IP phones, wireless access points, or other standards-compliant PoE, PoE+, and PoE++ end network devices. In addition, the 2x 100G QSFP28 ports, can provide high-speed uplink and server/storage/high-performance workstation connectivity. Offering high performance, high port density, and low latency, S5850-24XMG-U is well-suited to both the core and aggregation layers, enabling it to meet the requirements of the next-generation enterprise, Wi-Fi 6 Access, Metro, and HCI (Hyper-Converged Infrastructure) networks.

S5850-24B4C 24-port 10Gb Ethernet layer 3 switch features 24x 25G downlinks and 4x 100G QSFP28 uplinks. This managed enterprise switch can deliver 4 Tbps switching capacity and 2976 Mpps forwarding rate. It is packed with redundant hot-swappable power supplies, hot-swappable smart fans and hardware-level dual-flash chip for superior processing performance and network reliability. FS agile S5850-24B4C managed switch is ideal for enterprise network private cloud TOR, data center TOR, operator PE to meet the needs of high-speed, safe, intelligent networks.

S5850-16T16BS2Q is a high-performance Layer 3 Ethernet routing switch with 16x 10/100/1000BASE-T RJ45, 8x 10Gb SFP+, 8x 25Gb SFP28 ports and 2x 40Gb QSFP+ in a compact 1U form factor. It delivers 752 Gbps switching capacity and 540 Mpps forwarding rate. It is packed with redundant hot-swappable power supplies and variable-speed axial fans for superior processing performance.

Product highlights

- Support MLAG (Multi-Chassis Link Aggregation) for Uninterrupted Services
- 1+1 Hot-swappable Power Supplies
- Network Monitoring through Sampled Flow (sFlow)
- Support CLI / WEB / SNMP / OVSDDB / RPC-API for Flexible Operation
- Support SSH, ACL, AAA, 802.1X, RADIUS, TACACS+, etc. for Security
- Support IPv4/IPv6 Dual-stack for Future Network Expansion
- Support RIPng/OSPFv3/BGP4+/DHCPv6/IS-IS for Efficient Calculation
- Support QoS, BGP, ACL, VRRP, DHCP, etc.
- Support OSPF/OSPFv3, BGP4/BGP4+, ISIS, BFD
- Support VXLAN, NVGRE for Knowledge Sharing and Community-based Problem Solving
- Support G.8031, G.8032, Ethernet OAM, MPLS, VPLS, VPWS, L3VPN (Except for S5850-24S2Q / S5850-24XMG)
- Support Data Center Features (PFC, ECN etc.) to Build a Lossless and Low-latency Network (Only for S5850-48T4Q / S5850-48T4Q-PE / S5850-48S6Q / S5850-48S6Q-R / S5850-24T16B/ S5850-24B4C)
- Support IEEE 1588v2 Precision Time Protocol TC Mode (Only for S5850-24S2C-PE / S5850-24S2C / S5850-24S2C-DC / S5850-16T16BS2Q)
- Support IEEE 1588v2 Precision Time Protocol TC and BC Mode (Only for S5850-48B8C-PE / S5850-48S6Q-R-PE / S5850-48S8C-PE / S5850-48S6Q-R / S5850-48S8C-DC / S5850-24B4C/ S5850-48B8C / S5850-48S8C)

Platform details

Switch models and configurations

Figures 1 through 13 show the FS S5850 series switches.

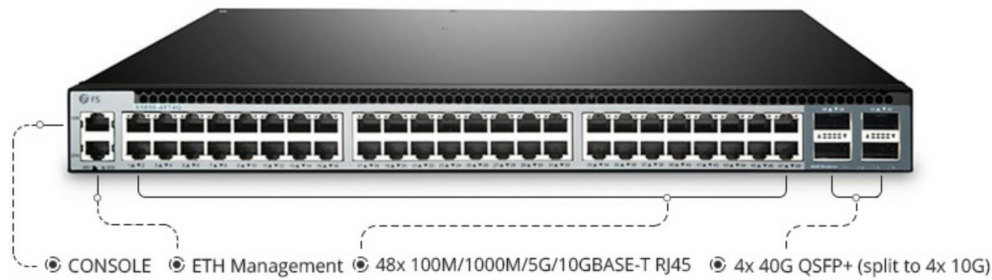


Figure 1.

S5850-48T4Q, 48-Port Ethernet L3 Switch, 48 x 10GBASE-T, with 4 x 40Gb QSFP+, Support MLAG

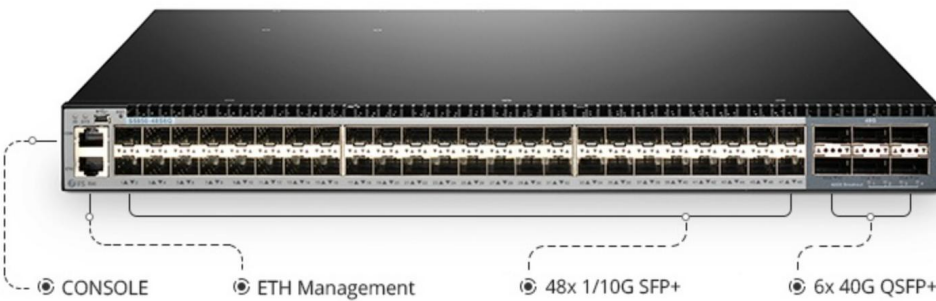


Figure 2.

S5850-48S6Q, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+, Support MLAG

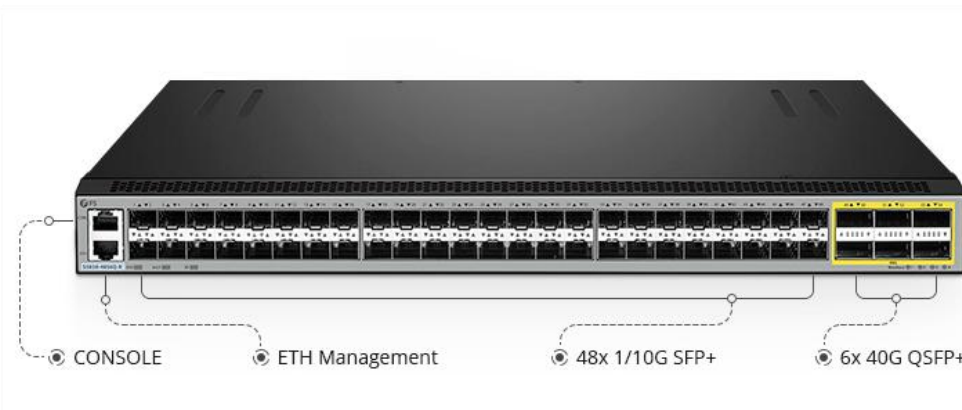


Figure 3.

S5850-48S6Q-R, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+, Support MLAG

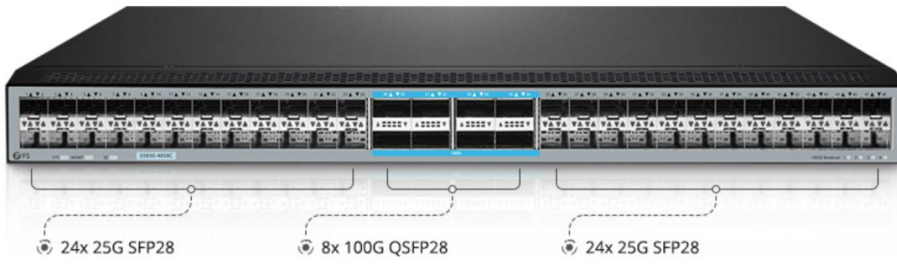


Figure 4.

S5850-48B8C, 48-Port Ethernet L3 Switch, 48 x 25Gb SFP28, with 8 x 100Gb QSFP28, Support MLAG

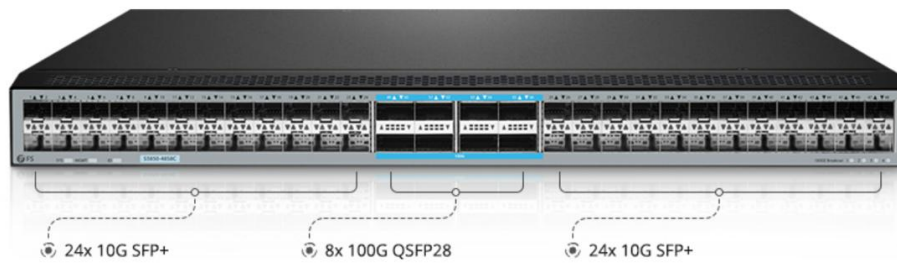


Figure 5.

S5850-48S8C, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 8 x 100Gb QSFP28, Support MLAG

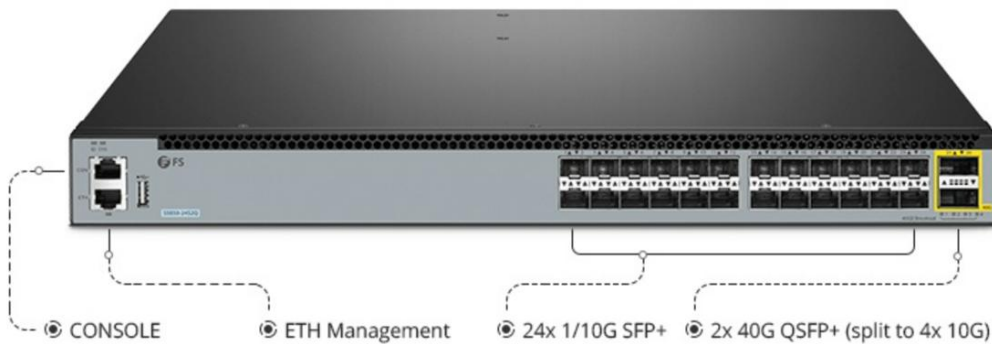


Figure 6.

S5850-24S2Q, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2 x 40Gb QSFP+, Support MLAG

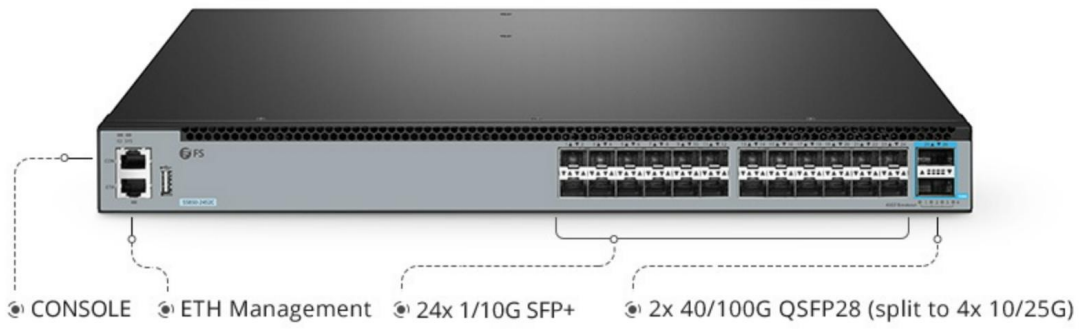


Figure 7.
S5850-24S2C, 24-Port Ethernet L3 Switch, 24x 10Gb SFP+, with 2x 100Gb QSFP28, Support MLAG

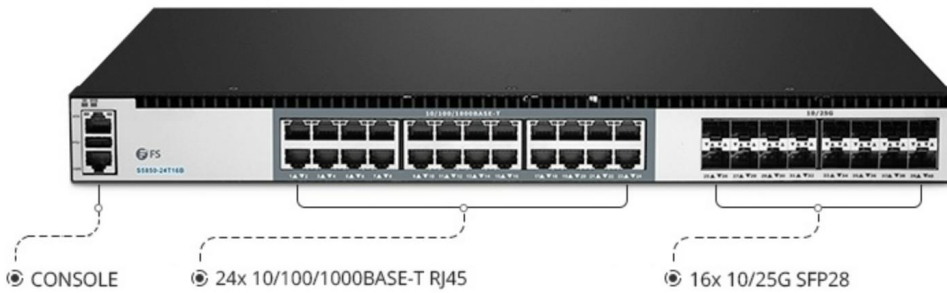


Figure 8.
S5850-24T16B, 16-Port Ethernet L3 Switch, 16 x 25Gb SFP28, with 24 x Gigabit RJ45, Hyper-Converged Infrastructure

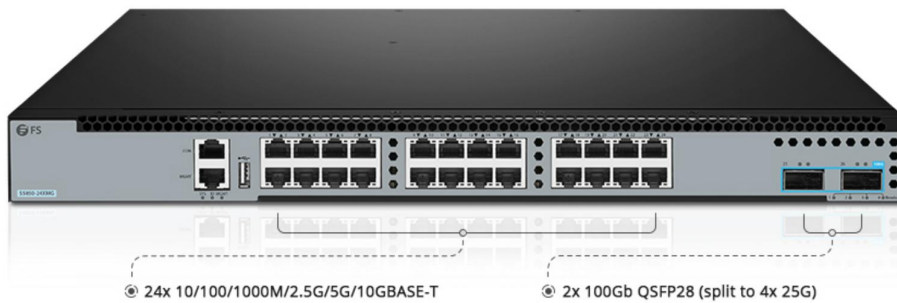


Figure 9.
S5850-24XMG, 24-Port Ethernet L3 Switch, 24 x 10GBASE-T/Multi-Gigabit, with 2 x 100Gb QSFP28, Support MLAG

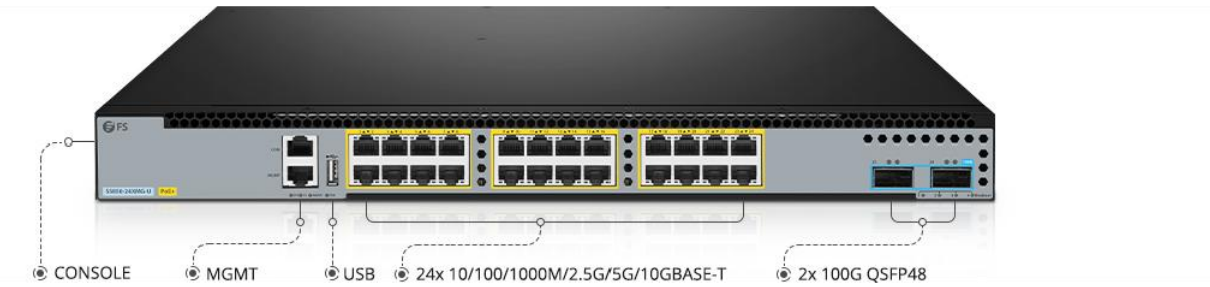


Figure 10.

S5850-24XMG-U, 24-Port Ethernet L3 PoE++ Switch, 24 x PoE++ Ports @1000W, with 2 x 100Gb QSFP28, Support MLAG

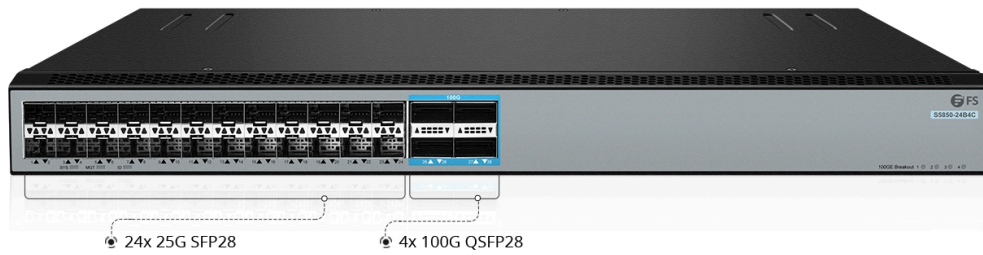


Figure 11.

S5850-24B4C, 24-Port Ethernet L3 Switch, 24 x 25GbSFP28, with 4 x 100Gb QSFP28,Support MLAG

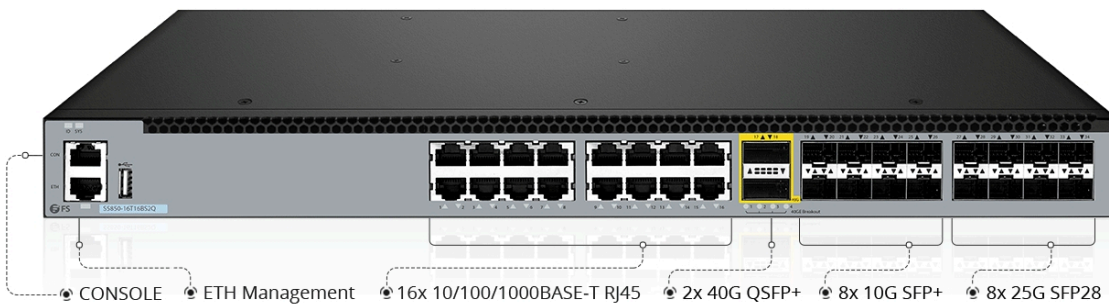


Figure 12.

S5850-16T16BS2Q, 16-Port Gigabit Ethernet L3 Switch, 16 x Gigabit RJ45, with 8 x 10Gb SFP+, 8 x 25Gb SFP28 and 2 x 40Gb QSFP+, Support MLAG

Switch configurations and port density

Table 1 through 4 show the FS S5850 series configurations and port density.

Table 1. Switch configuration and port density with 48 port

FS P/N	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
Description	48-Port Ethernet L3 Switch, 48 x 10GBASE-T, with 4 x 40Gb QSFP+	48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+	48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+	48-Port Ethernet L3 Switch, 48 x 25Gb SFP28, with 8 x 100Gb QSFP28	48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 8 x 100Gb QSFP28
Port					
1G port density	48	48	-	-	48
10G port density	48	48	48	48	48
25G port density	-	-	-	48	-
40G port density	4	6	6	-	-
100G port density	-	-	-	8	8
10G port density with breakout cable	16	-	24	32	32
25G port density with breakout cable	-	-	-	32	32
40G port density with breakout cable	-	-	-	8	8
Management ports	1	1	1	1	1
Console port	1	1	1	1	1
USB port	-	1	-	1	1
Memory and processor					
CPU	Freescle PowerPC P1010 533MHz	Freescle PowerPC P1010	Dual core/ARM A53	Dual core/ARM A53	Dual core/ARM A53
DRAM	1GB	1GB	-	2GB	2GB
SDRAM	1GB	1GB	2GB	2GB	2GB

FS P/N	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
Flash memory	2GB	2GB	8GB	8GB	8GB
Latency	0.67μs	0.6μs	0.7μs	0.7μs	0.7μs
Packet buffer	9MB	9MB	36MB	36MB	36MB

Table 2. Switch configuration and port density with 24 port

FS P/N	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG
Description	24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2 x 40Gb QSFP+	24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2x 100Gb QSFP28	16-Port Ethernet L3 Switch, 16 x 25Gb SFP28, with 24 x Gigabit RJ45	24-Port Ethernet L3 Switch, 24 x 10GBASE-T/Multi-Gigabit, with 2x 100Gb QSFP28
Port				
1G port density	24	24	24	24
10G port density	24	24	16	24
25G port density	-	-	16	-
40G port density	2	2	-	2
100G port density	-	2	-	2
10G port density with breakout cable	8	8	-	8
25G port density with breakout cable	-	8	-	8
40G port density with breakout cable	2	2	-	2
Management ports	1	1	1	1
Console port	1	1	1	1
USB port	1	1	1	1

FS P/N	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG
--------	-------------	-------------	--------------	-------------

Memory and processor

CPU	SOC (Dual core/ARM A53)	SOC(Dual core/ARM A53)	NXP LS1023A (A53 CPU/Dual core)	ARM A53 CPU
DRAM	1GB	2GB	1GB	2GB
SDRAM	1GB	2GB	1GB	2GB
Flash memory	8GB (eMMC)	8GB	4GB (eMMC)	8GB (eMMC)
Latency	0.66µs	0.66µs	0.57µs	0.66µs
Packet buffer	9MB	9MB	4MB	9MB

Table 3. Switch configuration and port density with 24 port

FS P/N	S5850-24XMG-U	S5850-24XMG-U	S5850-24B4C
Description	24-Port Ethernet L3 PoE+ Switch, 24 x PoE++ Ports @1000W, with 2 x 100Gb QSFP28	24-Port Ethernet L3PoE++ Switch, 24 xPoE++ Ports @2200W, with 2 x 100Gb QSFP28	24-Port Ethernet L3 Switch, 24 x 25Gb SFP28, with 4 x 100Gb QSFP28
Port			
1G port density	24	24	24
10G port density	24	24	24
25G port density	-	-	24
40G port density	-	-	4
100G port density	2	2	4
10G port density with breakout cable	2	2	16
25G port density with breakout cable	-	-	16

FS P/N	S5850-24XMG-U	S5850-24XMG-U	S5850-24B4C
40G port density with breakout cable	-	-	4
Management ports	1	1	1
Console port	1	1	1
USB port	1	1	1

Memory and processor

CPU	ARM A53 CPU	ARM A53 CPU	ARM A53 CPU
DRAM	2GB	2GB	2GB
SDRAM	2GB	2GB	-
Flash memory	8GB EMMC(OS) 4MB SPI Flash(Boot)	8GB EMMC(OS) 4MB SPI Flash(Boot)	8GB
Latency	0.66μs	0.66μs	0.7μs
Packet buffer	9MB	9MB	36MB

Table 4 . Switch configuration and port density with 16 port

FS P/N	S5850-16T16BS2Q
Description	16-Port Gigabit Ethernet L3 Switch, 16 x Gigabit RJ45, with 8 x 10Gb SFP+, 8 x 25Gb SFP28 and 2 x40Gb QSFP+
Port	
1G port density	-
10G port density	8
25G port density	8
40G port density	2
100G port density	-

FS P/N	S5850-16T16BS2Q			
100G port density	-			
10G port density with breakout cable	-			
25G port density with breakout cable	-			
40G port density with breakout cable	-			
Management ports	1			
Console port	1			
USB port	1			

Memory and processor

CPU	ARM A53 CPU
DRAM	2GB
SDRAM	-
Flash memory	8GB
Latency	0.66 μ s
Packet buffer	36MB

Note:

RJ45 ports can be used as 100M/1/2.5/5/10G ports for Ethernet connection, does not support 1G-T copper transceivers. SFP+ ports can be used for 1/10G connection. SFP28 can be used for 10/25G connection. QSFP+ can be used for 40G or 4x 10G connection. QSFP28 can be used for 40G/100G or 4x10G/4x25G connection.

Power supplies and fans

The FS S5850 Series switches ship with the dual 1+1 redundant power supply as default.

Table 5 through 8 provide more details on the FS S5850 series power supplies and fan specifications

Table 5 . Power supply and fan specifications with 48 port

FS P/N	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
Power supply	Dual 1+1 redundant power supplies (AC)	Dual 1+1 redundant power supplies (AC)	Dual 1+1 redundant power supplies (AC)	Dual 1+1 redundant power supplies (AC)	Dual 1+1 redundant power supplies (AC) ; 1+1 DC power supplies for S5850-48S8C-DC
Fan number	2x Hot-swappable Fan Modules (2 Fans Per Module)	4x Hot-swappable Fans (3+1 Redundancy)	4x Hot-swappable Fans (3+1 Redundancy)	4x Hot-swappable Fans (2+2 Redundancy)	4x Hot-swappable Fans (2+2 Redundancy)
Airflow	Front-to-Back; Back-to-Front (S5850-48T4Q-PE)	Front-to-Back	Front-to-Back; Back-to-Front (S5850-48S6Q-R-PE)	Front-to-Back; Back-to-Front (S5850-48B8C-PE)	Front-to-Back ; Back-to-Front (S5850-48S8C-PE)
Acoustic noise	<77dB	52.4dB	41.7dB	60.8dB	60.8dB (AC) 60.4dB (DC)
Maximum fan speed	15000rpm	15000rpm	19500RPM	19500rpm	19500rpm
Max. power consumption	250W	190W	145W	160W	160W
Power max rating	225W	150W	125W	125W	125W
Input-voltage range and frequency	<ul style="list-style-type: none"> Rated voltage range: 100-240VAC; 50-60Hz Maximum voltage range: <ul style="list-style-type: none"> -AC input: 90-264VAC; 47-63Hz; -High-Voltage DC input: 180 V DC to 300 V DC DC Input (S5850-48S8C-DC): -36V DC--72V DC 				
Power supply efficiency	94% (230Vac 50% Load)	92% (220Vac 50% load)	AC Input ≥95% (50% load) HVDC Input ≥95% (50% load) DC Input ≥85% (50% load)	95% (220Vac 50% load)	95% (220Vac 50% load); 85% (220Vac 50% load) for S5850-48S8C-DC
Input current	7.5A (MAX) at 100Vac	6A (MAX) at 100Vac - 127Vac	AC Input 7A(MAX) at 100Vac - 127Vac HVDC Input 3.5A (MAX) at 240Vdc DC Input 20A (MAX) at - 36VDC	7A (MAX) at 100Vac - 127Vac	7A (MAX) at 100Vac - 127Vac; 20A (MAX) at -36VDC (S5850-48S8C-DC)

FS P/N	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
Output ratings	550W	Main output: +12V Standby: +5V	Main output: +12V Standby: +12V	Main output: +12V Standby: +12V	Main output: +12V Standby: +12V
Output holdup time	11ms	Main output: >12ms Standby output: 70ms	AC and HVDC Input Main output: >11ms Standby output: 70ms DC Input Main output: >4ms Standby output: 70ms	Main output: >11ms Standby output: 70ms	AC and HVDC Input Main output: >11ms Standby output: 70ms DC Input(S5850-48S8C-DC) Main output: >4ms Standby output: 70ms
Power-supply input receptacles	C13	C13	C13	C13	C13
Power cord rating	10A	10A	10A	10A	10A

Table 6 . Power supply and fan specifications with 24 port

FS P/N	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG
Power supply	Dual 1+1 redundant power supplies (AC) ;11 DC power supplies for S5850-24S2Q-DC	Dual 1+1 redundant power supplies (AC) ;1+1 DC power supplies for S5850-24S2C-DC	Dual 1+1 redundant power supplies (AC)	Dual 1+1 redundant power supplies (AC)
Fan number	3x Hot-swappable Fans (2+1 Redundancy)	3x Hot-swappable Fans (2+1 Redundancy)	2x Hot-swappable Fan Modules (2 Fans Per Module)	2x Hot-swappable Fan Modules (2 Fans Per Module)
Airflow	Front-to-Back; Back-to-Front (S5850-24S2Q-PE)	Front-to-Back; Back-to-Front (S5850-24S2C-PE)	Front-to-Back	Front-to-Back
Acoustic noise	52.6dB	52.6dB	63.9dB	<64dB
Maximum fan speed	10000rpm	10000rpm	9000rpm	9000rpm
Max. power consumption	59W	59W	70W	110W

FS P/N	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG
Power max rating	44W	44W	55W	100W
Input-voltage range and frequency	<ul style="list-style-type: none"> Rated voltage range:100-240VAC; 50-60Hz Maximum voltage range: <ul style="list-style-type: none"> -AC input: 90-264VAC; 47-63Hz; -High-Voltage DC input: 190 V DC to 290 V DC -DC Input (S5850-24S2Q-DC & S5850-24S2C-DC): -36V DC~-72V DC 			
Power supply efficiency	84% (220Vac 50%load)	84% (220Vac 50%load)	89% (220Vac 50%load)	92% (230Vac 50%load)
Input current	2A (MAX) at 100Vac; 6A (MAX) at -36VDC (S5850-24S2Q-DC)	2A (MAX) at 100Vac; 6A (MAX) at -36VDC (S5850-24S2C-DC)	3A (MAX) at 90-136Vac	5.5A (MAX) at 90Vac
Output ratings	Main output: +12V Standby: +12V	Main output: +12V Standby: +12V	Main output: +12V Standby: +12V	350W
Output holdup time	AC and HVDC Input Main output: >12ms Standby output: 20ms DC Input(S5850-24S2Q-DC) Main output: >3ms Standby output: 20ms		20ms	11ms
Power-supply input receptacles	C13	C13	C13	C13
Power cord rating	10A	10A	10A	10A
PoE standard	-	-	-	-
PoE budget	-	-	-	-

Table 7 . Power supply and fan specifications with 24 port

FS P/N	S5850-24XMG-U	S5850-24XMG-U	S5850-24B4C
Power supply	Dual 1+1redundant power supplies (AC)	Dual 1+1redundant power supplies (AC)	Dual 1+1 redundant power supplies (AC)
Fan number	4 (2+2Redundancy) Hot-swappable	4 (2+2 Redundancy) Hot-swappable	4 (2+2 Redundancy) Hot-swappable
Airflow	Front-to-Back	Front-to-Back	Front-to-Back
Acoustic noise	<66dB	<66dB	61.2dB
Maximum fan speed	9000rpm	9000rpm	19500rpm
Max. power consumption	Single Power: 110W (1200W with PoE) Dual Power: 110W (2400W with PoE)	Single Power: 110W (1200W with PoE) Dual Power: 110W (2400W with PoE)	130W
Power max rating	100W	100W	-
Input-voltage range and frequency	<ul style="list-style-type: none"> Rated voltage range:100-240VAC; 50-60Hz Maximum voltage range: -AC input: 90-264VAC; 47-63Hz; -High-Voltage DC input: 190 V DC to 290 V DC DC Input (S5850-24S2Q-DC & S5850-24S2C-DC): -36V DC--72V DC 		
Power supply efficiency	94% (230Vac 50%load)	94% (230Vac 50%load)	95% (220Vac 50% load)
Input current	8.5A (MAX) at 90Vac	8.5A (MAX) at 90Vac	7A (MAX) at 100Vac - 127Vac
Output ratings	600W	1200W	Main output: +12V Standby: +12V
Output holdup time	16ms	16ms	Main output: >11ms Standby output: 70ms
Power-supply input receptacles	C13	C13	C13
Power cord rating	10A	10A	10A
PoE standard	IEEE 802.3af/at/bt	IEEE 802.3af/at/bt	-
PoE budget	2200W	2200W	-

Table 8 . Power supply and fan specifications with 16 port

FS P/N	S5850-16T16BS2Q		
Power supply	Dual 1+1redundant power supplies(AC)		
Fan number	3 Smart Fans		
Airflow	Front-to-Back		
Acoustic noise	77dB		
Maximum fan speed	9000rpm		
Max. power consumption	55W		
Power max rating	55W		
Input-voltage range and frequency	Rated voltage range:100-240VAC; 50-60Hz		
Power supply efficiency	84% (50% load)		
Input current	2A		
Output ratings	12V		
Output holdup time	12ms		
Power-supply input receptacles	C13		
Power cord rating	10A		

Switch performance

Table 9 through 13 shows performance specifications for the FS S5850 series switches.

Table 9 . Performance specifications with 48 port

FS P/N	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
Switching capacity	1.28 Tbps	1.44 Tbps	1.44Tbps	4Tbps	2.56Tbps
Forwarding rate	952.3 Mpps	1071.4 Mpps	1071.4 Mpps	2976 Mpps	1905 Mpps
Total number of MAC addresses	65K	64K	120K	120K	120K
Total number of IPv4 routes (indirect routes)	32768	8192	60K	56K	56K
Total number of IPv4 host routes (direct routes and ARP)	20480	4096	60k	16,384	16,384
Total number of IPv6 routes (indirect routes)	1536	1536 (IPv6 profile)	4096	4096	4096
Total number of IPv6 host routes (direct routes and NDP)	4096	4096 (IPv6 profile)	4096	2048	2048
Total number of IPv4 multicast routes	1024	1536	2048	1024	1024
Total number of IPv6 multicast routes	512	1536 (IPv6 profile)	256	512	512

FS P/N	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
QoS ACL scale	1959	1959	-	6126	6126
Security ACL scale	2103	IPv4: 1927 (ingress port), 256 (ingress VLAN) 176 (egress port), 32 (egress VLAN) IPv6: 1903 (ingress port), 256 (ingress VLAN) 152 (egress port), 32 (egress VLAN)	IPv4: 5949 (ingress), 3949 (egress) IPv6: 5949 (ingress), 3949 (egress)	IPv4: 5949 (ingress), 3949 (egress) IPv6: 5949 (ingress), 3949 (egress)	IPv4: 5949 (ingress), 3949 (egress) IPv6: 5949 (ingress), 3949 (egress)
VLAN IDs	4096	4094	4094	4094	4094
STP virtual ports (port* VLANs) for MST	52	64	64	64	64
Total switched virtual interfaces (SVIs)	128	256	256	256	256
Jumbo frame	9.6KB	9.6KB	9.6KB	9.6KB	9.6KB

Switch performance

Table 10. Performance specifications with 24 port

FS P/N	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG	S5850-24XMG-U	S5850-24XMG-U	S5850-24B4C
Switching capacity	640 Gbps	880 Gbps	848 Gbps	848 Gbps	880Gbps	880Gbps	2Tbps
Forwarding rate	480Mpps	540Mpps	630.9 Mpps	654 Mpps	654 Mpps	654 Mpps	1488 Mpps
Total number of MAC addresses	96K	96K	64K	98K	98K	98K	120K
Total number of IPv4 routes (indirect routes)	56K	56K	24576	57344	57344	57344	60K
Total number of IPv4 host routes (direct routes and ARP)	12288	12288	3072	12288	12288	12288	16384
Total number of IPv6 routes (indirect routes)	4K	4096	1536 (IPv6 profile)	4096	4096	4096	4096

FS P/N	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG	S5850-24XMG-U	S5850-24XMG-U	S5850-24B4C
Total number of IPv6 host routes (direct routes and NDP)	2048	2048	2048 (IPv6 profile)	2048	2048	2048	2048
Total number of IPv4 multicast routes	2048	2048	1536	1024	1024	1024	2048
Total number of IPv6 multicast routes	256	256	512 (IPv6 profile)	512	512	512	256
QoS ACL scale	1532	1532	1276	1532	1532	1532	6126
Security ACL scale	IPv4: 1488 (ingress), 464 (egress) IPv6: 744 (ingress), 232 (egress)	IPv4: 1488 (ingress), 464 (egress) IPv6: 744 (ingress), 232 (egress)	IPv4: 1208 (ingress), 464(egress) IPv6: 604 (ingress),203 (egress)	1952	1952	1952	IPv4: 5949 (ingress), 1901 (egress) IPv6: 5949 (ingress), 1901 (egress)
VLAN IDs	4094	4094	4094	4094	4094	4096	4094
STP virtual ports (port* VLANs) for MST	64	64	64	52	52	52	64
Total switched virtual interfaces (SVIs)	256	256	256	256	256	256	256
Jumbo frame	9600B	9600B	9600B	9600B	9600B	9600B	9600B

Switch performance

Table 11. Performance specifications with 16 port

FS P/N	S5850-16T16BS2Q
Switching capacity	752 Gbps
Forwarding rate	540 Mpps
Total number of MAC addresses	98304

FS P/N	S5850-16T16BS2Q		
Total number of IPv4 routes (indirect routes)	56K		
Total number of IPv4 host routes (direct routes and ARP)	12288 (default)		
Total number of IPv6 routes (indirect routes)	4K		
Total number of IPv6 host routes (direct routes and NDP)	2048 (default)		
Total number of IPv4 multicast routes	-		
Total number of IPv6 multicast routes	256		
QoS ACL scale	1532		
Security ACL scale	IPv4: 1488 (ingress), 464 (egress) IPv6: 744 (ingress), 232 (egress)		
VLAN IDs	4094		
STP virtual ports (port* VLANs) for MST	64		
Total switched virtual interfaces (SVIs)	256		
Jumbo frame	9600B		

Platform benefits

Table 12 lists the software spotlights for the FS S5850 series switches.

Table 12. Software spotlights

Functionality	Description
Multi-Chassis Link Aggregation (MLAG)	All 1G/10G/40G ports support MLAG Connects to other switches and servers by LAG or LACP without other proprietary protocols The software supports up to 63 MLAG members Support mixed configuration MLAG with S3950, S5800, S5850 and S8050 series switches
Metro Advanced License	Support advanced features of MPLS, LDP, MPLS-L2VPN, MPLS-L3VPN, VxLAN-BGP-EVPN, IPFIX LIC-FIX-MA license is required to enable the advanced features
Multicast Efficiency	Support the IPv4 and IPv6 multicast functions Support IGMP v1/v2/v3, IGMP Snooping v1/v2/v3, MLD, PIM, PIM-SM, PIM-SSM
Data Center Features	Support NVGRE, VXLAN, GENEVE Support Priority Flow Control (PFC) Support Enhanced Transmission Selection (ETS) (Except for S5850-24B4C) Support Quantized Congestion Notification (QCN) (Except for S5850-24B4C)
High Reliability	Support 240 ECMP groups, each group can support up to 64 members (Only for S5850-48B8C / S5850-48S8C) Support LACP, VRRP, VARP, Smart Link, BFD, ERPS, G.8031, G.8032, Load-Balancing, etc Support the Spanning Tree Protocols (IEEE802.1d STP, IEEE802.1w RSTP, standard 802.1s MSTP) Support STP Protocol Protection (BPDU Guard, Root Guard, Loop Guard, Anti TC-BPDU attack) Support modular power redundancy Support modular fan redundancy
Sound Security Protection Policies	Support prevent DDOS attack (Only for S5850-24S2Q / S5850-24B4C) Support IPv4/IPv6 ACL and MAC whitelisting Support ARP inspection Support IP source guard Support IEEE802.1X RADIUS authentication, TACAS+ Support DHCP Server Relay/Snooping Support Control Plane Protect (CoPP) black & white list and rate limit features
QoS	Support 13 hardware queues per-port (8 unicast queues, 4 multicast queues and 1 monitor queue) Support 10 hardware queues per-port (8 unicast queues, 1 multicast queues and 1 monitor queue) (Only for S5850-48B8C / S5850-48S8C / S5850-24B4C) Support Weighted Random Early Detection (WRED) Support Tail Drop (TD) Support Strict Priority (SP) scheduling Support Weighted Deficit Round Robin (WDRR) scheduling Support SP + WDRR mixed scheduling Support traffic classification based on COS/DSCP (simple classification)
Easy Network Maintenance	Support CLI-based, using console ports Support WEB UI, Telnet, SSH, using 10/100/1000Mbps management port or service ports Support SNMP (Managed by Zabbix) v1, v2, and v3 Support RPC-API for Software Defined Network (SDN)

Functionality	Description
Triple-play Service Support (Only for S5850-48B8C / S5850-48S8C / S5850-24B4C)	Offer high bandwidth for Triple-Play services such as IPTV, video monitoring The built-in QoS capabilities and flexible queuing technologies guarantee high quality of services Support rich multicast protocol set (IGMP snooping, IGMP v1/v2/v3, PIM-SM) Support up to 2K multicast groups and 4K logical replications per group Support IPTV service and multicast latency control
IPv4/IPv6 Dual-Stack (Only for S5850-24S2Q / S5850-24S2C / S5850-24B4C)	Support line-rate IPv4/IPv6 dual-stack Support RIP, OSPFv2, BGP, static routing, RIPng, OSPFv3 and BGP4+

Software requirements

The FS S5850 Series Switches run on FS OS Software version.

Table 13 lists the latest software requirements for the switch models.

Table 13. Latest software requirements

FS P/N	Description	Latest software requirements
S5850-48T4Q	S5850-48T4Q, 48-Port Ethernet L3 Switch, 48 x 10GBASE-T, with 4 x 40Gb QSFP+, Support MLAG	FSOS V7.4.3.R3.R Software
S5850-48S6Q	S5850-48S6Q, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+, Support MLAG	FSOS V7.4.3.R3.R Software
S5850-48S6Q-R	S5850-48S6Q-R, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+, Support MLAG	-
S5850-48B8C	S5850-48B8C, 48-Port Ethernet L3 Switch, 48 x 25Gb SFP28, with 8 x 100Gb QSFP28, Support MLAG	-
S5850-48S8C	S5850-48S8C, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 8 x 100Gb QSFP28, Support MLAG	-
S5850-24S2Q	S5850-24S2Q, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2 x 40Gb QSFP+, Support MLAG	FSOS V7.4.3.R3.R Software
S5850-24S2Q-DC	S5850-24S2Q-DC, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2 x 40Gb QSFP+, Support MLAG, Dual DC PSUs	FSOS V7.4.3.R3.R Software
S5850-24S2C	S5850-24S2C, 24-Port Ethernet L3 Switch, 24x 10Gb SFP+, with 2x 100Gb QSFP28, Support MLAG	FSOS V7.4.3.R3.R Software
S5850-24T16B	S5850-24T16B, 16-Port Ethernet L3 Switch, 16 x 25Gb SFP28, with 24 x Gigabit RJ45, Hyper-Converged Infrastructure	FSOS V7.4.3.R3.R Software
S5850-24XMG	S5850-24XMG, 24-Port Ethernet L3 Switch, 24 x 10GBASE-T/Multi-Gigabit, with 2 x 100Gb QSFP28, Support MLAG	-
S5850-24XMG-U	S5850-24XMG-U, 24-Port Ethernet L3 PoE++ Switch, 24 x PoE++ Ports @1000W, with 2 x 100Gb QSFP28, Support MLAG	-
S5850-24B4C	S5850-24B4C, 24-Port Ethernet L3 Switch, 24 x 25Gb SFP28, with 4 x 100Gb QSFP28, Support MLAG	-
S5850-16T16BS2Q	S5850-16T16BS2Q, 16-Port Gigabit Ethernet L3 Switch, 16 x Gigabit RJ45, with 8 x 10Gb SFP+, 8 x 25Gb SFP28 and 2 x 40Gb QSFP+, Support MLAG	-

Licensing

Metro Advanced License includes the functions of MPLS, LDP, MPLS-L2VPN, MPLS-L3VPN, VxLAN-BGP-EVPN, IPFIX. The license is specific to the switch for which it is issued and is not valid on any other switch, so the license is not portable across devices.

Metro Advanced License is offered as perpetual license, it is applicable to multiple devices, including [S5800-48T4S](#), [S5800-48F4SR](#), [S5850-24T16S](#), [S5850-24T16B](#), [S5850-24XMG](#), [S5850-32S2Q](#), [S5850-48S6Q](#), [S5850-48S6Q-R](#), [S5850-48S2Q4C](#), [S5850-48T4Q](#), [S8050-20Q4C](#), [S5800-48T4S-DC](#), [S5800-48F4SR-DC](#), [S5850-24B4C](#), [S5850-16T16BS2Q](#).

For more information, visit: <https://www.fs.com/products/100590.html>

Product specifications

Table 14 through 16 show the product specifications for the FS S5850 series switches.

Table 14. Product specifications with 48 port

Description	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
Environmental					
Operating temperature	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)
Storage temperature	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)
Operating humidity	10% to 90% (Non-condensing)	10% to 90% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)
Storage humidity	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)
Temperature alarm	Supported	Supported	Supported	Supported	Supported
Acoustic noise	<77dB	52.4dB	41.7dB	60.8dB	60.8dB (AC) 60.4dB (DC)
Physical specifications					
Dimensions (HxWxD)	1.72"x17.32"x16.54" (43.6x440x420mm)	1.72"x17.32"x18.5" (43.6x440x470mm)	1.73"x17.4"x17.75" (44x442x451mm)	1.73"x17.5"x18.9" (44x442x422mm)	1.73"x17.5"x18.9" (44x442x422mm)
Rack units (RU)	1 RU	1 RU	1 RU	1 RU	1 RU

Description	S5850-48T4Q	S5850-48S6Q	S5850-48S6Q-R	S5850-48B8C	S5850-48S8C
Weight	17 lbs (7.9kg)	18 lbs (8.3kg)	20.3 lbs (9.2kg)	20.3 lbs (9.2kg)	20.3 lbs (9.2kg)
Distance	100M	-	-	-	-
Electrical					
Voltage (auto ranging)	100-240VAC	100-240VAC	100-240VAC	100-240VAC	100-240VAC; -36V to -72V (S5850-48S8C-DC)
Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Current	7.5A Max	6A Max	7A Max	7A Max	7A Max
Power rating (maximum consumption)	225W	150W	125W	125W	125W
Mean-time between failures					
MTBF (hours)	>90,000	97,210.07	>70,080	162,213	162,213
Connectors					
Connectors and cabling	<ul style="list-style-type: none"> 1/10GBASE-T ports: RJ-45 connectors, 4-pair Cat5E/Cat6/Cat6a UTP cabling SFP transceivers: LC fiber connectors (single-mode or multimode fiber) SFP+ transceivers: LC fiber connectors (single-mode or multimode fiber) SFP28 transceivers: LC fiber connectors (single-mode or multimode fiber) QSFP+ transceivers: MPO and LC fiber connectors (single-mode or multimode fiber) QSFP28 transceivers: MPO and LC fiber connectors (single-mode or multimode fiber) Ethernet management port: RJ-45 connectors, 4-pair Cat5 UTP cabling Management console port: RJ-45-to-DB9 cable for PC connections 				
Power connectors	<ul style="list-style-type: none"> Customers can provide power to a switch by using the internal power at the back of the switch Internal power supply connector: The internal power supply is an auto-ranging unit. It supports input voltages between 100 (115 for 1100WAC) and 240 VAC. Use the supplied AC power cord to connect the AC power connector to an AC power outlet 				
Standards					
Standards	802.1s, 802.1w, 802.1x, 802.1ad, 802.1d, 802.1p, 802.1q, RMON, SNMPV1 V2 V3				

Table 15. Product specifications with 24 port

Description	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG	S5850-24XMG-U	S5850-24XMG-U	S5850-24B4C
Environmental							
Operating temperature	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)	0 to 45°C (32 to 113°F)
Storage temperature	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)
Operating humidity	0 to 95% (Non-condensing)	10% to 90% (Non-condensing)	10% to 90% (Non-condensing)	10% to 90% (Non-condensing)	10% to 90% (Non-condensing)	10% to 90% (Non-condensing)	0 to 95% (Non-condensing)
Storage humidity	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)	0 to 95% (Non-condensing)
Temperature alarm	Supported	Supported	Supported	Supported	Supported	Supported	Supported
Acoustic noise	52.6dB	52.6dB	63.9dB	<64dB	<66dB	<66dB	73.3dB
Physical specifications							
Dimensions (HxWxD)	1.73"x17.5" x14.6"(43.6x440x370mm)	1.73"x17.5" x14.6"(43.6x440x370mm)	1.72"x17.32" x13.78"(43.6x440x350mm)	1.72"x17.40"x14.04" (43.6x442x356.5mm)	17.40"x14.04" x1.72"(442x356.5x43.6mm)	17.40"x14.04"x1.72"(442x356.5x43.6mm)	1.73"x17.4" x17.75" (44x442x451 mm)
Rack units (RU)	1RU	1RU	1RU	1RU	1RU	1RU	1RU
Weight	13.11 lbs (5.95kg)	13.11 lbs (5.95kg)	13 lbs (5.8kg)	15.34 lbs (6.96kg)	15.65lbs (7.1kg)	15.65lbs (7.1kg)	19.4lbs (8.8kg)
Distance	-	-	-	100M	100M	100M	-
Electrical							
Voltage (auto ranging)	100-240VAC; -36V to -72V (S5850-24S2Q-DC)	100-240VAC; -36V to -72V (S5850-24S2C-DC)	100-240VAC	100-240VAC	100-240VAC	100-240VAC	100-240VAC
Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Current	2A	2A	3A	5.5A	8.5A	8.5A	7A Max

Description	S5850-24S2Q	S5850-24S2C	S5850-24T16B	S5850-24XMG	S5850-24XMG	S5850-24XMG	S5850-24B4C
Power rating (maximum consumption)	44W	44W	55W	100W	100W without PoE	100W without PoE	130W
Mean-time between failures							
MTBF (hours)	206,988	206,988	216,431.48	>90,000	90,000	90,000	198,000
Connectors							
Connectors and cabling	<ul style="list-style-type: none"> 1/10GBASE-T ports: RJ-45 connectors, 4-pair Cat5E/Cat6/Cat6a UTP cabling SFP transceivers: LC fiber connectors (single-mode or multimode fiber) SFP+ transceivers: LC fiber connectors (single-mode or multimode fiber) SFP28 transceivers: LC fiber connectors (single-mode or multimode fiber) QSFP+ transceivers: MPO and LC fiber connectors (single-mode or multimode fiber) QSFP28 transceivers: MPO and LC fiber connectors (single-mode or multimode fiber) Ethernet management port: RJ-45 connectors, 4-pair Cat5 UTP cabling Management console port: RJ-45-to-DB9 cable for PC connections 						
Power connectors	<ul style="list-style-type: none"> Customers can provide power to a switch by using the internal power at the back of the switch Internal power supply connector: The internal power supply is an auto-ranging unit. It supports input voltages between 100 (115 for 1100WAC) and 240 VAC. Use the supplied AC power cord to connect the AC power connector to an AC power outlet 						
Standards							
Standards	802.1s, 802.1w, 802.1x, 802.1ad, 802.1d, 802.1p, 802.1q, RMON, SNMPV1 V2 V3						

Table 16. Product specifications with 16 port

Description	S5850-16T16BS2Q						
Environmental							
Operating temperature	0 to 45°C (32 to 113°F)						
Storage temperature	40 to 70°C (-40 to 158°F)						
Operating humidity	0 to 95% (Non-condensing)						

Description	S5850-16T16BS2Q
--------------------	------------------------

Storage humidity 0 to 95% (Non-condensing)

Temperature alarm	Supported
--------------------------	-----------

Acoustic noise 51.8dB

Physical specifications

Dimensions (HxWxD) 1.73"x17.5"x14.6" (43.6x440x370mm)

Rack units (RU)	1RU
------------------------	-----

Weight 13.44 lbs (6.1kg)

Distance	100M
-----------------	------

Electrical

Voltage (auto ranging)	100-240VAC
-------------------------------	------------

Frequency 50-60Hz

Current	2A Max
----------------	--------

Power rating (maximum consumption) 55W

Mean-time between failures

MTBF (hours) >70080

Description	S5850-16T16BS2Q
--------------------	------------------------

Connectors

Connectors and cabling

- 1/10GBASE-T ports: RJ-45 connectors, 4-pair Cat5E/Cat6/Cat6a UTP cabling
- SFP+ transceivers: LC fiber connectors (single-mode or multimode fiber)
- SFP28 transceivers: LC fiber connectors (single-mode or multimode fiber)
- QSFP+ transceivers: MPO and LC fiber connectors (single-mode or multimode fiber)
- Ethernet management port: RJ-45 connectors, 4-pair Cat5 UTP cabling
- Management console port: RJ-45-to-DB9 cable for PC connections

Power connectors

- Customers can provide power to a switch by using the internal power at the back of the switch
- Internal power supply connector: The internal power supply is an auto-ranging unit. It supports input voltages between 100 (115 for 1100WAC) and 240 VAC. Use the supplied AC power cord to connect the AC power connector to an AC power outlet

Standards

Standards

802.1x, AAA, RMON, SNMPV1 V2 V3, HTTP Telnet, SSH

Quality certification

At FS, our Quality Commitment lies in all aspects of processes, resources, and methods that enable us to build superior networks for our customers. Through a quality policy focusing on continuous improvement of products and services, we're able to achieve the highest levels of satisfaction for our customers. To that end, every FS employee is accountable for contributing to the value of the products and services we deliver.

Figure 14 shows some of the authoritative certifications obtained by FS S5850 Series Switches.



Figure 14.

Optics supported

For details about the optical modules available, visit:

S5850-48T4Q: [Transceivers DACs and AOCs Supported on S5850-48T4Q Switch](#)

S5850-24S2Q: [Transceivers DACs and AOCs Supported on S5850-24S2Q Switch](#)

Warranty, service and support

FS S5850 Series Switches enjoy 5 years limited warranty against defects in materials or workmanship. For more information for FS Returns & Refunds policy, visit <https://www.fs.com/policies/warranty.html> or https://www.fs.com/policies/day_return_policy.html

FS provides a personal account manager, free professional technical support, and 24/7 live customer service to each customer.

- Professional Lab: Test each product with the latest and advanced networking equipment.
- Free Technical Support: Provide free & tailored solutions and services for your businesses.
- 80% Same-day Shipping: Immediate shipping for in-stock items.
- Fast Response: Direct and immediate assistance from an expert.

For more information, visit https://www.fs.com/service/fs_support.html

Ordering information

Table 17 provides the ordering information for S5850 series switches.

Table 17. Ordering information

FS P/N	Product description
Switch hardware	
S5850-48T4Q	S5850-48T4Q, 48-Port Ethernet L3 Switch, 48 x 10GBASE-T, with 4 x 40Gb QSFP+, Support MLAG
S5850-48T4Q-PE	S5850-48T4Q-PE, 48-Port Ethernet L3 Switch, 48 x 10GBASE-T, with 4 x 40Gb QSFP+, Support MLAG
S5850-48S6Q	S5850-48S6Q, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+, Support MLAG
S5850-48S6Q-R	S5850-48S6Q-R, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+, Support MLAG
S5850-48S6Q-R-PE	S5850-48S6Q-R-PE, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 6 x 40Gb QSFP+, Support MLAG
S5850-48B8C	S5850-48B8C, 48-Port Ethernet L3 Switch, 48 x 25Gb SFP28, with 8 x 100Gb QSFP28, Support MLAG
S5850-48B8C-PE	S5850-48B8C-PE, 48-Port Ethernet L3 Switch, 48 x 25Gb SFP28, with 8 x 100Gb QSFP28, Support MLAG
S5850-48S8C	S5850-48S8C, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 8 x 100Gb QSFP28, Support MLAG
S5850-48S8C-PE	S5850-48S8C-PE, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 8 x 100Gb QSFP28, Support MLAG
S5850-48S8C-DC	S5850-48S8C-DC, 48-Port Ethernet L3 Switch, 48 x 10Gb SFP+, with 8 x 100Gb QSFP28, Support MLAG, Dual DC PSUs
S5850-24S2Q	S5850-24S2Q, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2 x 40Gb QSFP+, Support MLAG
S5850-24S2Q-PE	S5850-24S2Q-PE, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2 x 40Gb QSFP+, Support MLAG
S5850-24S2Q-DC	S5850-24S2Q-DC, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2 x 40Gb QSFP+, Support MLAG, Dual DC PSUs
S5850-24S2C	S5850-24S2C, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2x 100Gb QSFP28, Support MLAG
S5850-24S2C-PE	S5850-24S2C-PE, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2x 100Gb QSFP28, Support MLAG
S5850-24S2C-DC	S5850-24S2C-DC, 24-Port Ethernet L3 Switch, 24 x 10Gb SFP+, with 2x 100Gb QSFP28, Support MLAG, Dual DC PSUs
S5850-24T16B	S5850-24T16B, 16-Port Ethernet L3 Switch, 16 x 25Gb SFP28, with 24 x Gigabit RJ45, Hyper-Converged Infrastructure
S5850-24XMG	S5850-24XMG, 24-Port Ethernet L3 Switch, 24 x 10GBASE-T/Multi-Gigabit, with 2 x 100Gb QSFP28, Support MLAG
S5850-24XMG-U	S5850-24XMG-U, 24-Port Ethernet L3 PoE++ Switch, 24 x PoE++ Ports @1000W, with 2 x 100Gb QSFP28, Support MLAG
S5850-24XMG-U	S5850-24XMG-U, 24-Port Ethernet L3 PoE++ Switch, 24 x PoE++ Ports @2200W, with 2 x 100Gb QSFP28, Support MLAG

FS P/N	Product description
--------	---------------------

[S5850-24B4C](#) S5850-24B4C, 24-Port Ethernet L3 Switch, 24 x 25Gb SFP28, with 4 x 100Gb QSFP28, Support MLAG

[S5850-16T16BS2Q](#) S5850-16T16BS2Q, 16-Port Gigabit Ethernet L3 Switch, 16 x Gigabit RJ45, with 8 x 10Gb SFP+, 8 x 25Gb SFP28 and 2 x 40Gb QSFP+, Support MLAG

FS P/N	Product description
--------	---------------------

Software licenses

LIC-FIX-MA	Metro Advanced License for S5800, S5850, S8050 Series Switches, Includes MPLS, VXLAN-BGP-EVPN, Permanent
----------------------------	--

Power supplies

GPR150-A1M	Hot-swappable AC Power Module 150W, for S5800-48F4SR, S5800-48T4S, S5850-24S2Q, S5850-24S2C
----------------------------	---

[FSP150-HS12](#) Hot-swappable DC Power Module 150W, for S5800-48F4SR, S5800-48T4S, S5850-24S2Q

YM-1151E	Hot-swappable DC Power Module 150W, for S5850-32S2Q, S5800-8TF12S, S5850-24T16B, T5850-32S2Q, T5800-8TF12S
--------------------------	--

[GW-T150WV12](#) Hot-swappable AC Power Module 150W, for S5850-32S2Q, S5800-8TF12S, S5850-24T16B, T5850-32S2Q and T5800-8TF12S

[UM400D01-01](#) Hot-swappable DC Power Module 400W, for S5850-48S6Q, S5850-48S2Q4C, S8050-20Q4C, T5850-48S6Q, T5850-48S2Q4C, T8050-20Q4C

Fan Module

AFM-5850-8050	Hot-swappable Fan Module, Front-to-Back Airflow through the S5850-48S6Q, S5850-48S2Q4C and S8050-20Q4C Switches Chassis
-------------------------------	---

Spare power cords

FSPSABSC13-10A	6ft (1.8m) SABS to IEC320 C13 250V/10A Power Extension Cord, Black
--------------------------------	--

Additional information

For more information about the S5850 Series Switches, contact your account manager or visit https://www.fs.com/search_result?keyword=S5850

Document history

New or revised topic	Described in	Date
FS S5850 Series Switches Data Sheet	Add S5850-16T16BS2Q	10/13/2023
FS S5850 Series Switches Data Sheet	Add S5850-24B4C	5/29/2023
FS S5850 Series Switches Data Sheet	Add S5850-48S6Q-R; S5850-48S6Q-R-PE; S5850-48B8C-PE; S5850-48S8C-PE; S5850-24S2Q-PE; S5850-24S2C-PE	2/2/2023
Updates to FS S5850 Series Switches Data Sheet	Updated all	10/29/2022



Shenzhen (China)

Address: 24F, Yingfeng Center, Haitian 2nd Rd,
Nanshan District, Shenzhen
Tel: +86 (755) 8357 1351
Email: sales@feisu.com

Delaware (United States)

Address: 380 Centerpoint Blvd, New Castle,
DE 19720, United States
Tel: +1 (888) 468 7419
Email: us@fs.com

Munich (Germany)

Address: NOVA Gewerbepark Building 7, Am
Gfild 7,85375 Neufahrn bei Munich, Germany
Tel: +49 (0) 8165 4099 260
Email: de@fs.com

Singapore

Address: 30A Kallang Pl, #11-10/11/12 Singapore
339213
Tel: +65 6443 7951
Email: sg@fs.com

Wuhan (China)

Address: 9-14F, Optical Valley Software Park
A7, Guanshan Ave, Wuhan
Tel: +86 (027) 8808 9195
Email: sales@feisu.com

Birmingham (United Kingdom)


Address: Regus Edmund House, 12-22 Newhall
Street, Birmingham, B3 3AS
Tel: +49 (0) 8165 4099 260
Email: uk@fs.com

Melbourne (Australia)

Address: 57-59 Edison Rd, Dandenong South,
VIC 3175, Australia
Tel: +61 3 9693 3488
Email: au@fs.com

Tokyo (Japan)

Address: JS Progress Building, 4-1-23 Heiwajima,
Ota-ku, Tokyo 〒143-0006
Tel: 03-5826-8305
Email: jp@fs.com



FS has several offices around the world. Addresses, phone numbers are listed on the FS Website at https://www.fs.com/contact_us.html
FS and FS logo are trademarks or registered trademarks of FS in the U.S. and other countries.