



More details here

Storage A+ Server ASG-2115S-NE332R

2U front-loading all-flash storage server with 32 E3.S NVMe drives and PCIe 5.0

Key Applications

Software-defined Storage, In-Memory Computing, Data Intensive HPC, Private & Hybrid Cloud, NVMe Over Fabrics Solution,


Key Features

- Single Socket SP5 AMD EPYC™ 9004/9005 Series processor; up to 360W TDP;
- Supports 24 DIMMs with 2DPC, up to 9TB memory capacity with 24 DIMMs of 384GB 3DS RDIMM/RDIMM DDR5 ECC memory;
- 2 PCIe 5.0 x16 slots & 2 AIOM connectors (OCP 3.0 SFF compliant);
- 32 Hot-swap E3.S (7.5mm) NVMe PCIe5.0 x2 drive bays;
- Redundant Titanium 2000W Power Supplies;




Form Factor	2U Rackmount Enclosure: 438.4 x 89.8 x 789.9mm (17.2" x 3.5" x 30.8") Package: 673.1 x 254 x 1098.55mm (26.5" x 10" x 43.25")
Processor	Single processor(s) AMD EPYC™ 9004/9005 Series Processors (* AMD EPYC™ 9005 Series drop-in support requires board revision 2.x)
System Memory	Slot Count: 24 DIMM slots Max Memory (1DPC): Up to 3TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (2DPC): Up to 6TB 4000MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (1DPC): Up to 4.5TB 5200MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor) Max Memory (2DPC): Up to 9TB 4400MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor)
Drive Bays Configuration	Default: Total 34 bays • 2 rear hot-swap 2.5" SATA drive bays • 32 front hot-swap E3.S 1T PCIe 5.0 x2 NVMe drive bays M.2: 1 M.2 PCIe 3.0 x2 NVMe slot (M-key 2280/22110) 1 M.2 PCIe 3.0 x4 NVMe slot (M-key 2280/22110)
Expansion Slots	PCI-Express (PCIe) Configuration: Default • 2 PCIe 5.0 x16 FHHL slots • 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible) M.2: 2 M.2 PCIe 3.0 x2 NVMe slots (M-key 2280/22110)
On-Board Devices	Chipset: AMD System on Chip Network Connectivity: Via AIOM
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) 2 USB 3.0 ports(front) Video: 1 VGA port

(Front View – System)

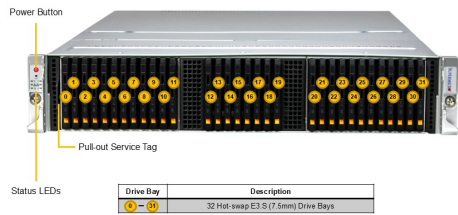

(Rear View – System)

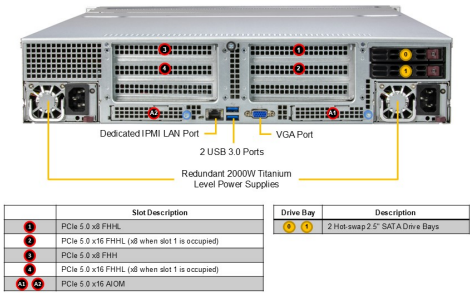

System Cooling	Fans: 4 Heavy Duty 8cm Fan(s) Air Shroud: 1 Air Shroud
Power Supply	2x 2000W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 4+1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors Voltage: +1.8V, +12V, +3.3V, +5V, +5V standby, 10 -fan status, 3.3V standby, HT, Memory, VBAT
Dimensions and Weight	Weight: Gross Weight: 77 lbs (34.93 kg) Net Weight: 55 lbs (24.95 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	Super H13SSF
Chassis	CSE-236E3-R2K08P